


REV. A

MODEL: R2012E-□D1-16010

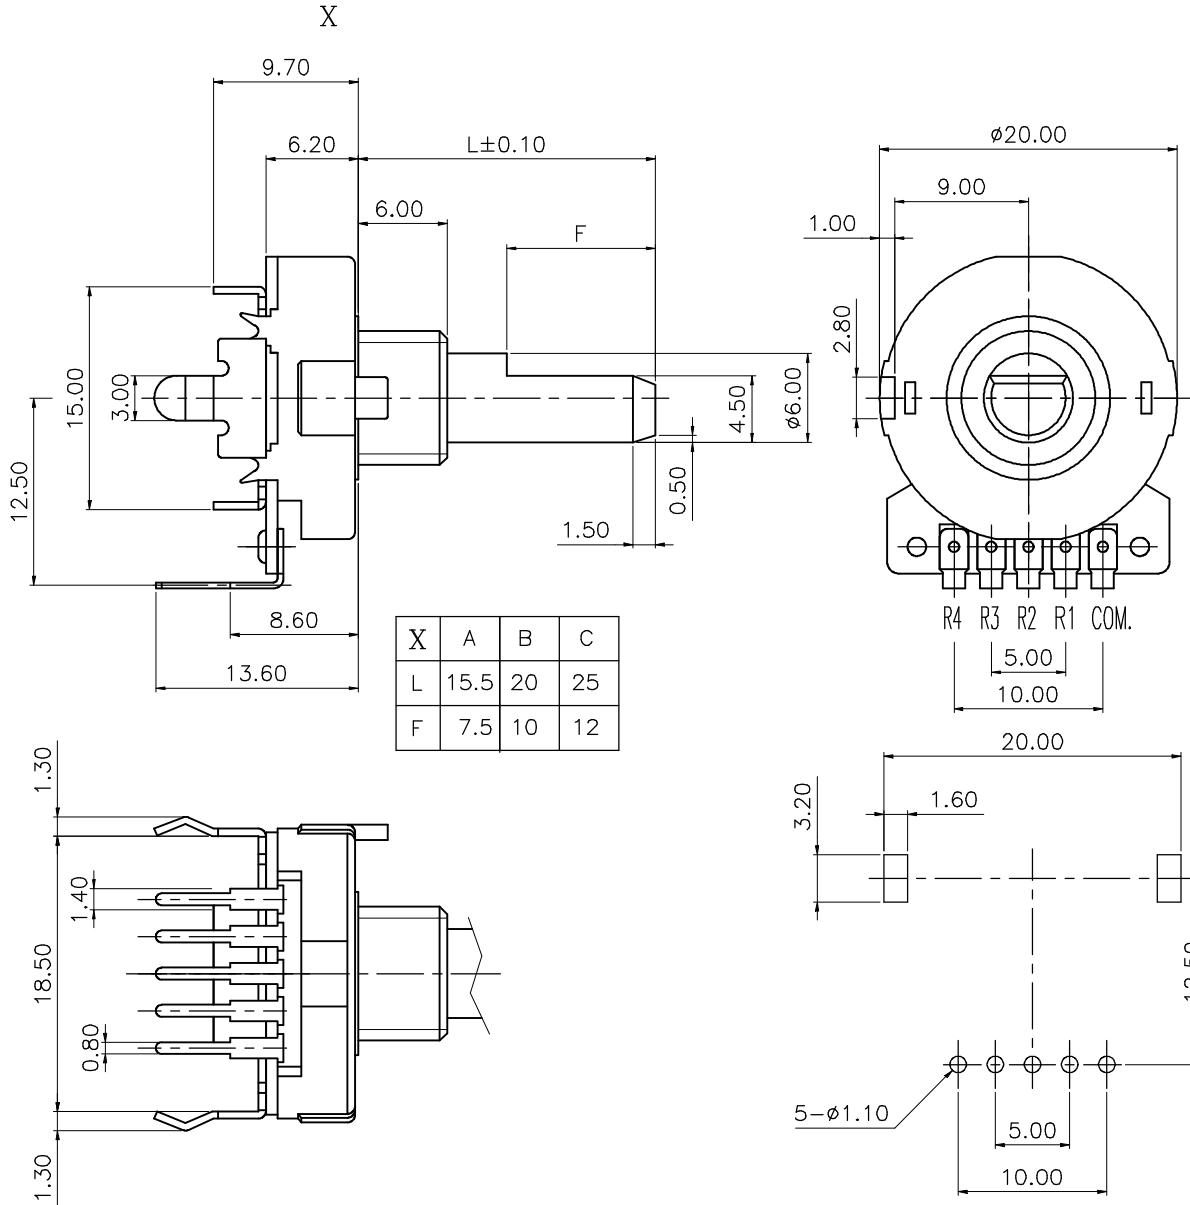

Mounting hole detail

START POSITION	C.W.																1 : ON
POS.																	0 : OFF
TERM.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
R1	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0	
R2	0	0	1	1	1	1	0	0	0	0	1	1	1	1	0	0	
R3	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	
R4	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	

MODEL: R2012E-□D1-16010

Mechanical characteristics:機械的性能:

Item<項目>	Performance<性能>
Total rotational angle/travel 全迴轉角度/行程	360°
Click torque C.C.扭力	120~300 gf.cm
Push-pull strength 軸推拉強度	10 kgf
Click position C.C.位置	16 detent

Electrical characteristics:電氣的性能:

Item<項目>	Performance<性能>
Rated power 定格電力	10V DC ,10mA
Insulation resistance 絕緣抵抗	More than 100MΩ at DC 100V
Manual Soldering heat 手焊錫溫度	Below 300°C,Less than 3 seconds.

Durability:耐久的性能:

Item<項目>	Performance<性能>
Rotational life 迴轉壽命	15,000 cycles