



REV.	ECN. NO.	APPD.
A	REL DWG	-----

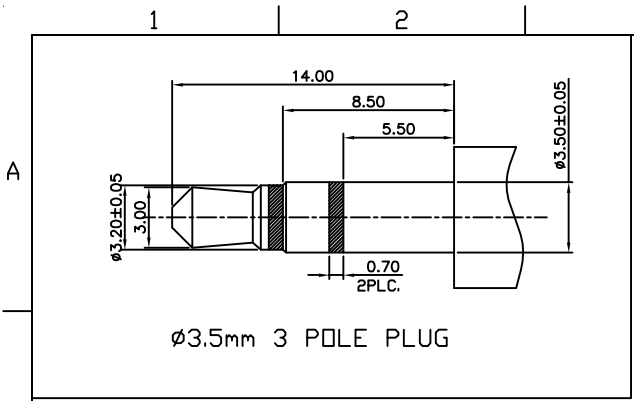

ø3.5mm 3 POLE PLUG






NOTES:

- ELECTRICAL CHARACTERISTICS:
 - WORKING VOLTAGE : 36V MAX.
 - CONTACT RESISTANCE: 50 MILLIOHMS MAX. INITIAL. 100 MILLIOHMS MAX. AFTER TEST.
- MATING FORCE: 3.0Kgf Max.
- UNMATING FORCE: 0.3Kgf Min.
- DURABILITY: 5,000 CYCLES.
- PACKING: TAPE REEL.
- SOLDER HEAT RESISTANCE REFLOW SOLDERING 260° 10 SECS.


7. PART NO. DESCRIPTION:

AAR 12- 04 * * 0 * *
① ② ③ ④


- | | |
|---|---|
| ① HOUSING COLOR
1: BLACK | ③ PACKAGE
2: TAPE REEL |
| ② CONTACT GOLD PLATED
W: G/F OVERALL | ④ MARK
0: NON MARK
5: +D/C
H: HT+D/C |

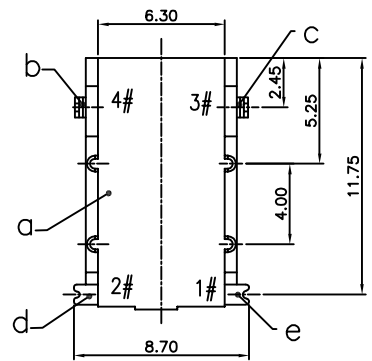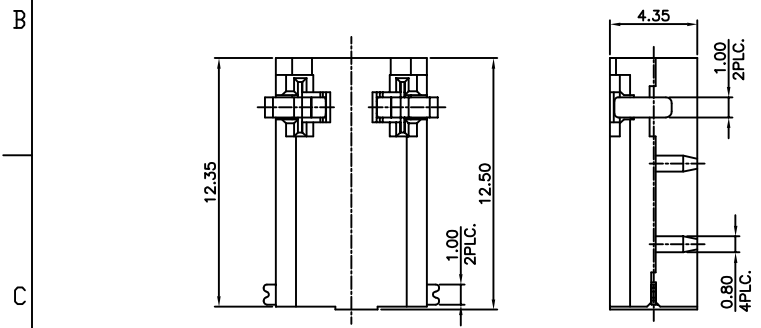

SCHEMATIC

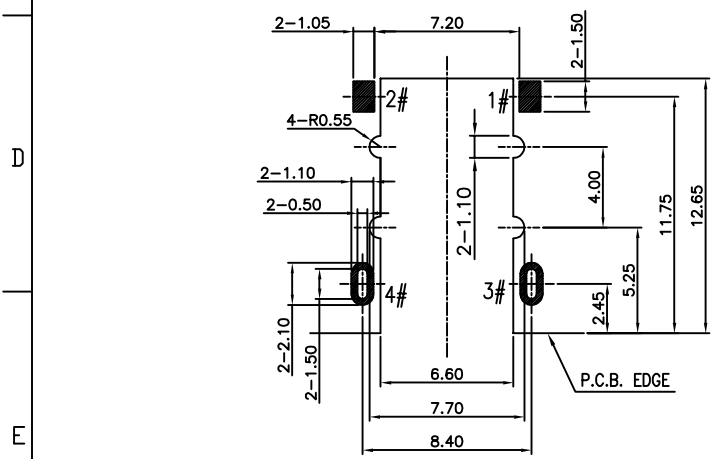

RECOMMEND P.C.B LAYOUT (THICKNESS=0.8mm)



e	1# CONTACT	1	COPPER ALLOY	NICKEL UNDER PLATING OVER ALL. GOLD FLASH PLATING OVER NICKEL .	T=0.2
d	2# CONTACT	1	COPPER ALLOY	NICKEL UNDER PLATING OVER ALL. GOLD FLASH PLATING OVER NICKEL .	T=0.2
c	3# CONTACT	1	COPPER ALLOY	NICKEL UNDER PLATING OVER ALL. GOLD FLASH PLATING OVER NICKEL .	T=0.2
b	4# CONTACT	1	COPPER ALLOY	NICKEL UNDER PLATING OVER ALL. GOLD FLASH PLATING OVER NICKEL .	T=0.2
a	HOUSING	1	THERMOPLASTIC	BLACK	
ITEM	DESCRIPTION	Q'TY	MATERIAL	TREATMENT	REMARK
INTENDED USE		Q'TY	FINISH	HUNG TA H.T.ENTERPRISE CO.,LTD	
PART NO. AAR12-04**0**		FILE NO. C-AAR12-00-AO		TITLE: AUDIO JACK CL=0.1mm	
TOLERANCES .X±0.35 .X*± .XX±0.25 .XX*±		MAT'L		APPD: Kevin 09/09/'10 CHKD: Allon 09/09/'10 DR: Allon 09/09/'10	DWG NO: C-AAR12-00-AO SCALE
				REV. A	SHEET 1 OF 1