
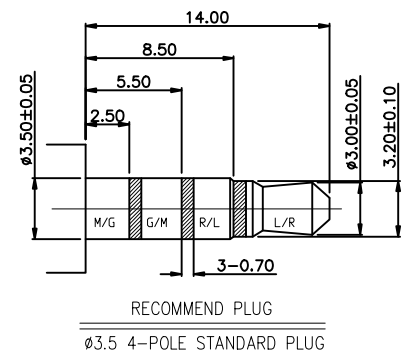








REV.	ECN NO.	DESCRIPTION	APPD.
A			

A  
B  
C  
D  
E


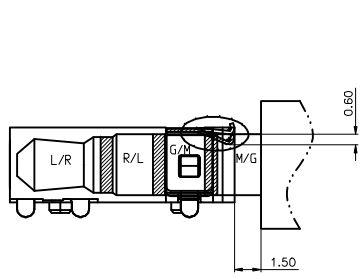


- NOTES:
- ELECTRICAL CHARACTERISTICS:  
CONTACT RESISTANCE:  
50 MILLIOHMS MAX.(INITIAL)  
100 MILLIOHMS MAX.(AFTER TEST)
  - MATING FORCE: 3.0Kgf Max.
  - UNMATING FORCE: 0.2Kgf Min.
  - DURABILITY: 10,000 CYCLES.
  - PACKING: TAPE REEL.
  - SOLDER HEAT RESISTANCE REFLOW SOLDERING 260° 10 SECS.
  - PART NO. DESCRIPTION:




- AAR30-06 Z 1 N 2 5  
① ② ③ ④
- ① HOUSING COLOR                      ③ PACKAGE  
Z: BLUE 285C                            2: TAPE REEL
- ② CONTACT GOLD PLATED            ④ MARK  
1: G/F ON CONTACT AREA            5: NO MARK + D/C

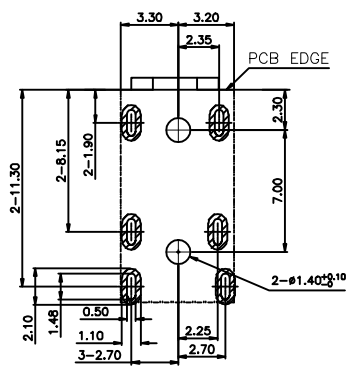

RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)  
PCB TOLERANCES: ±0.05



6# PIN	1	PHOSPHOR BRONZE	UNDER PLATED 50u" Min. NICKEL OVER ALL; GOLD FLASH PLATED OVER ALL INSULATOR COLOR: BLACK
5# PIN	1	PHOSPHOR BRONZE	UNDER PLATED 50u" Min. NICKEL OVER ALL; GOLD FLASH PLATED OVER ALL
4# PIN	1	PHOSPHOR BRONZE	UNDER PLATED 50u" Min. NICKEL OVER ALL; GOLD FLASH PLATED OVER ALL
3#PIN	1	PHOSPHOR BRONZE	UNDER PLATED 50u" Min. NICKEL OVER ALL; GOLD FLASH PLATED OVER ALL
2#PIN	1	PHOSPHOR BRONZE	UNDER PLATED 50u" Min. NICKEL OVER ALL; GOLD FLASH PLATED OVER ALL
1# PIN	1	STAINLESS STEEL	UNDER PLATING 50u" Min. COPPER OVER ALL; NICKEL PLATING 50-90u" OVER ALL
HOUSING	1	THERMOPLASTIC	PANTONE BLUE 285C

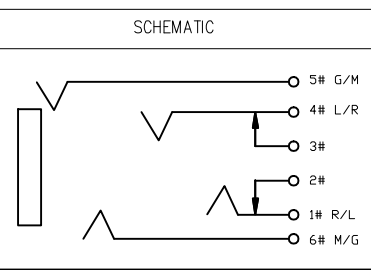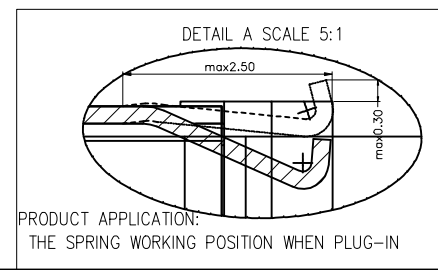

PART NO.	DESCRIPTION	Q'TY	MATERIAL	TREATMENT
INTENDED USE	ASSEMBLE/QC			
PART NO.	FINISH	FILE NO.	TITLE:	
AAR30-06Z1N25		C-AAR30-00-A0	AUDIO JACK 4POLE	
TOLERANCES	MAT'L	APPD:	DWG NO:	REV.
X.±0.5 .X±0.35 .XX±0.25 .XXX±0.15 ANGLES ±2°		LONG 20140515	C-AAR30-00-A0	A
		DR: LONG 20140515	SCALE	SHEET 1 OF 1

