


NOTE:
 1.MATERIAL:
 HOUSING: THERMOPLASTIC HIGH TEMP WITH 40% GF, UL94V-0.
 CONTACT: BRASS T=0.20mm
 SHELL: STAINLESS T=0.50mm
 2.FINISH:
 CONTACT: GOLD PLATING ON CONTACT AREA,
 MATTE TIN PLATING ON SOLDERTAILS
 100U" MIN. NICKEL UNDERPLATING OVERALL.
 SHELL: 50~90U" NICKEL PLATING OVERALL.

- 3.PRODUCT NO. DESCRIPTION
 H A R 10-19 1 A N 2 H
 ① ② ③ ④ ⑤
- ① HOUSING COLOR 1:BLACK
 - ② CONTACT PLATED AG/F+MATTE TIN
 - ③ SHELL PLATED C:30U"+MATTE TIN
 - ④ PACKAGE 2:TAPE REEL
 - ⑤ MARK 0: ND MARK
- S: +D/C
 H: HT+D/C
 N: NICKEL

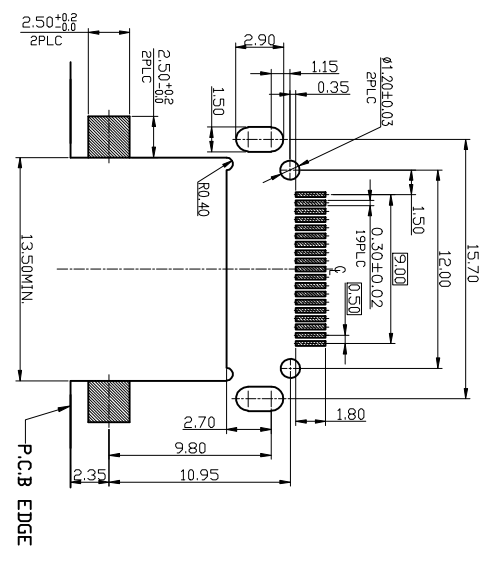

RECOMMENDED P.C.B LAYOUT(THICKNESS=1.2mm)
 (COMPONENT SIDE)TOLERANCES±0.05mm

INTENDED USE	QTY	FINISH	FILE NO.	TITLE:
			C-HAR10-00-A0	HUNG TA H. ENTERPRISE CO., LTD
PART NO.			APPD: Yang 05/23/12	DWG NO.
HAR10-19*****		MAT'L	CHKD: Ailon 05/23/12	C-HAR10-00-A0
TOLERANCES			DIR: Ailon 05/23/12	SCALE N/A
X ± 0.35 X ± 3°				SHEET 1 OF 1
XX± 0.25 XX±				

REV.	CHK. IN.	APP.