


REV.	ECN. NO.	APPD.
A	DWG REL.	

- NOTES:
- MATERIAL:
    - 1-1. HOUSING: THERMOPLASTIC, UL 94V-0, BLACK.
    - 1-2. CONTACT: COPPER ALLOY. (T=0.25mm)
    - 1-3. METAL (T=0.30mm)
  - FINISH:
    - 2-1. CONTACT: UNDER PLATED 50u" MIN NICKEL ALL AREA. 100u" MIN MATTE TIN IN SOLDER TAIL AREA. GOLD PLATED AT CONTACT AREA.
    - 2-2. SHELL: NICKEL 50u" MIN. PLATING OVERALL.
  - ENVIRONMENTAL CHARACTERISTICS:
    - 3-1. OPERATION TEMPERATURE RANGE : -10°C TO +85°C.
  - PART NO. DESCRIPTION:

RECOMMEND P.C.B LAYOUT (TOLERANCE: ±0.03)  
(COMPONENT VIEW) THICKNESS 1.20mm

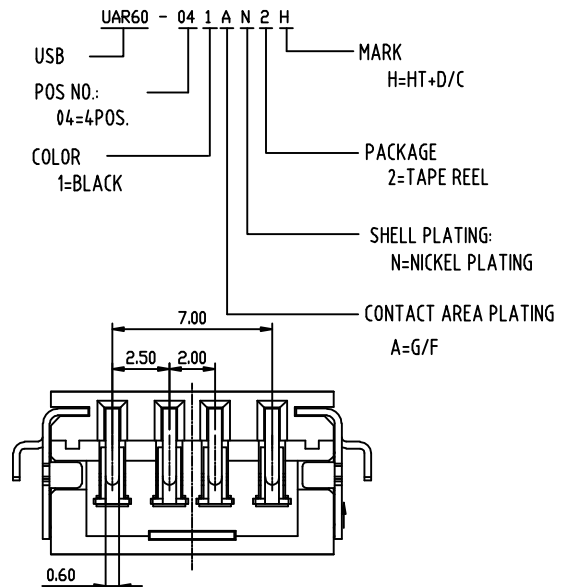

INTENDED USE	Q'TY		HUNG TA H.T. ENTERPRISE CO., LTD	
PART NO. UAR60-041AN2H	FINISH		FILE NO. C-UAR60-00-A0	TITLE: USB A TYPE
TOLERANCES .X ± 0.35 .X' ± .XX ± 0.25 .XX' ±	MAT'L	APPD:	DWG NO.: C-UAR60-00-A0	REV. A
		CHKD: LONG 2814.1224	SCALE: N/A	SHEET: 1 OF 1
		DR: LONG 2814.1224		