


RECOMMEND P.C.B LAYOUT (TOLERANCES ±0.05mm)

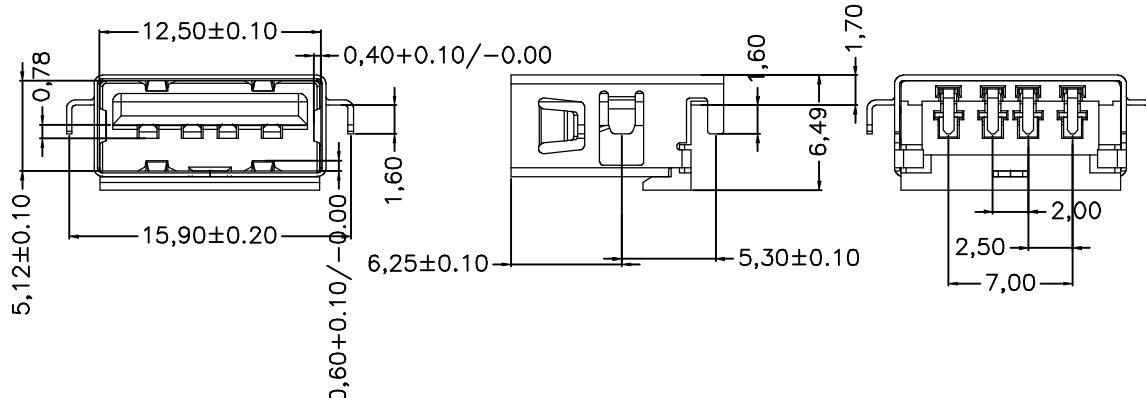

NOTE:
 SPECIFICATION:
 1).Voltage Current Rating: 1A, 30VAC(rms)
 2).Insulation Resistance: 1000MΩ Min.
 3).Contact Resistance: 30mΩ Max.
 4).Dielectric Withstanding Voltage: 500V AC
 5).Temperature Rating: -20°C to +85°C
 MECHANICAL:
 1). Mating Force: 3.57Kgf (35N) Max
 2). Unmating force: 1.02Kgf (10N) Min
 3). DURABILITY: 5000 Cycles,
 Unmating force 0.80 Kgf min

GENERAL TOLERANCE				HT HUNG TA H.T.ENTERPRISE CO.,LTD			
General		Angle		TITLE:			
X.	±0.38	X°	±3.0°	USB			
.X	±0.30	.X°	±2.0°	PART NO:			
.XX	±0.25	.XX°	±1.0°	K-UAR105-041AN00			
.XXX	±0.10	.XXX°	±0.5°	UNIT:mm		SCALE:1:1	

				CHECKED	APPROVED			REV:A
No.	DATE	DESCRIPTION	APPROVEDE					
1	2	3	4	5	6	7	8	11