
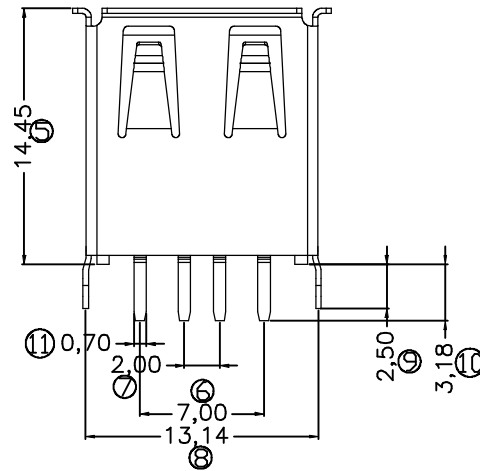


RECOMMEND P.C.B LAYOUT (TOLERANCES $\pm 0.05\text{mm}$)
(COMPONENT SIDE) THICKNESS=1.2mm

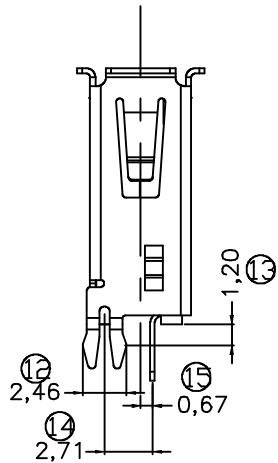

NOTE:

SPECIFICATION:

- 1). Voltage Current Rating: 1.5A, 30VAC(rms)
- 2). Insulation Resistance: $1000\text{M}\Omega$ Min.
- 3). Contact Resistance: $30\text{m}\Omega$ Max.
- 4). Dielectric Withstanding Voltage: 500V AC
- 5). Temperature Rating: -55°C to $+85^\circ\text{C}$

MECHANICAL:

- 1). Mating Force: 3.57Kgf (35N) Max
- 2). Unmating force: 1.02Kgf (10N) Min
- 3). DURABILITY: 1500 Cycles

GENERAL TOLERANCE				HT HUNG TA H.T. ENTERPRISE CO.,LTD			
General		Angle		TITLE:			
X.	± 0.38	X°	$\pm 3.0^\circ$	USB A			
.X	± 0.30	.X°	$\pm 2.0^\circ$	PART NO:			
.XX	± 0.25	.XX°	$\pm 1.0^\circ$	K-UAR108-040AN20			
.XXX	± 0.10	.XXX°	$\pm 0.5^\circ$	UNIT:mm		SCALE:1:1	
				SIZE:A4		REV:A	

				CHECKED	APPROVED		
Δ	:	:					
No.	DATE	DESCRIPTION	APPROVEDE				

1 2 3 4 5 6 7 8 9 10 11