
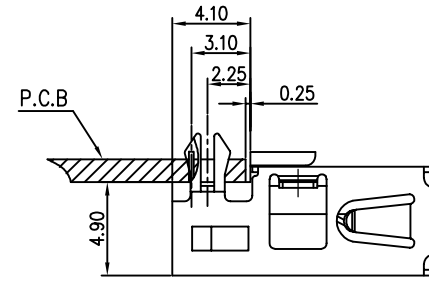
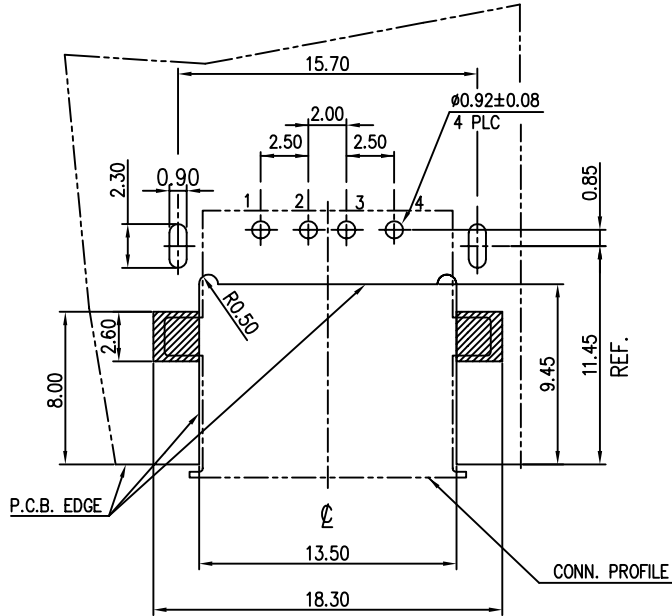


REV.	ECN. NO.	APPD.

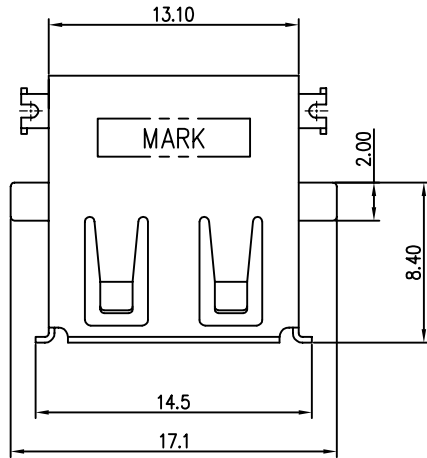

PROPOSAL DRAWING

MATERIAL:

- ① HOUSING: THERMOPLASTIC, GLASS FIBER FILLED. UL 94V-0 RATED.
- ② CONTACT: PHOSPHOR BRONZE (t=0.25mm).
- ③ FRONT SHIELD: BRASS (t=0.30mm).

FINISH:




- CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL OVER 100u" MIN. TIN IN SOLDERING AREA GOLD PLATED IN CONTACT AREA.
- SHIELD: N: PLATED WITH 40u" THICKNESS NICKEL OVER 50u" MIN. THICKNESS Cu.

PART NO. DESCRIPTION:

UAR33- 04 * * * * *
①②③④⑤

- ① HOUSING COLOR 1: BLACK
- ② CONTACT PLATED C: 30u"+MATTE TIN
- ③ SHELL PLATED N: NICKLE
- ④ PACKAGE 2: TAPE REEL
- ⑤ MARK 5: +D/C V: JJP+D/C

RECOMMENDED P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) P.C.B. TOLERANCE: ±0.05

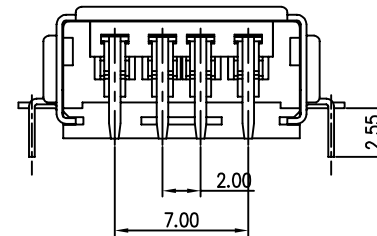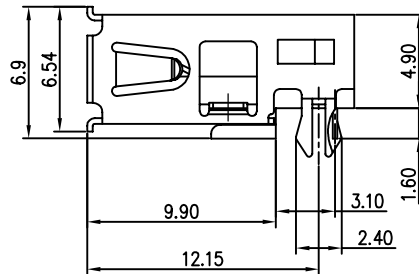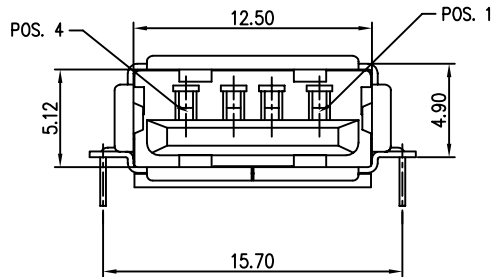

INTENDED USE	Q'TY FINISH		HUNG TA H.T. ENTERPRISE CO., LTD	
PART NO. UAR33-04*****		FILE NO. C-UAR33-00-A0	TITLE: USB SERIES A CONNECTOR LOW PROFILE, REVERSE TYPE	
TOLERANCES .X ± 0.35 .X ± .XX ± 0.25 .XX ±	MAT'L	APPD: Kiven 08/05/09 CHKD: Allon 08/05/09 DR: Allon 08/05/09	DWG NO.: C-UAR33-00-A0	REV. A
			SCALE N/A	SHEET 1 OF 1